
Rivolta



B.R.X. 540 In-depth cleaner for floors

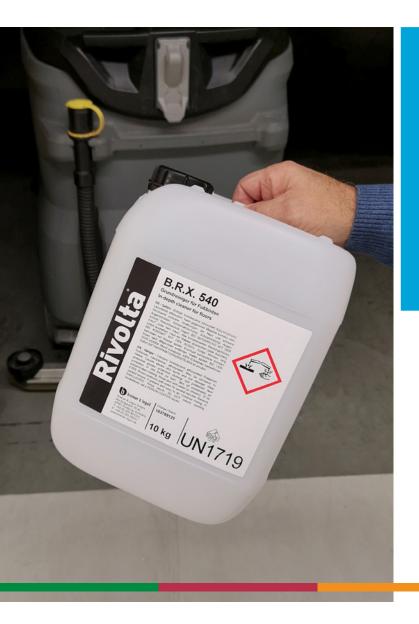

The benefits at a glance

- Phosphate-fre
- Low-foaming
- Highly concentrated substance combination
- Solvent-free
- Very good cleaning power



Rivolta

CASSIDA

VITROLIS

antıdot.

Properties

Rivolta B.R.X. 540 is a highly alkaline phosphate- and aminefree concentrate with extremly elevated high alkalinity for the basic and maintenance cleaning of all alkali- and water-resistant hall floors, workshop floors and working pits. Its ingredients remove even the most stubborn dirt.

B.R.X. 540 is well suited for manual and automated cleaning procedures.

Fields of application

Rivolta B.R.X. 540 is supplied exclusively as concentrate and can be mixed with water in any ratio. The concentration depends on the degree of contamination of the surfaces to be cleaned.

- Maintenance cleaning: 1:5 to 1:50 diluted with water
- concentrate or up to 1:1 diluted with water - Basic cleaning:

After the application of the cleaning solution and after a prolonged exposure time, work with scrubbing brush or machine. Grab the waste water, vacuum it or rinse with water. The cleaner should not be used on warm surfaces, the drying of the application solution should be avoided.

Material compatibility

With the first application Rivolta B.R.X. 540 has to be tested at a hidden part before use in oder to test the material compatibility.

Instructions for use

For automatic dosing or machine application of **Rivolta B.R.X. 540** it is important to follow the manufacturer's instructions. After each cleaning process it is recommended to rinse the unit with clear water until all traces of dirt and cleaning product residues have been removed.

Suitable application devices and accessories in our accessories brochure.

Form	liquid	- Available in: • 10 L can • 220 kg drum
Colour	colourless	
Odour	characteristic	

	Value	Norm
Density at +15 °C	1,05 g/cm³	DIN 51757
pH-value undiluted at +20 °C	> 13,5	DIN 19268



Bremer & Leguil GmbH

Am Burgacker 30 - 42 • 47051 Duisburg • Germany Tel. +49 203 99 23-0 • Fax +49 203 2 59 01 info@bremer-leguil.de

This text contains facts and statements and is determined with our best knowledge and will be che-cked continuously. These statements are depending - among other reasons - on experiences gained in the industry. We only pass them on without liability. Before using our products you should test the applicability and you should convince yourself of the satisfactory performance. Our application examples and suggestions should not request to violate patent rights. Product illustra-tions partly consist of picture compositions and therefore, do not necessarily reflect the reality.