

F.L. CPG Spray

Synthetic corrosion protection spray



The benefits at a glance

- NSF-H1 registered
- Fully synthetic
- Very good water resistance
- Excellent corrosion protection
- Easy removability
- Free of acids, resins and silicone
- Easy and economical processing



Properties

Rivolta F.L. CPG Spray is a fully synthetic corrosion protection spray for the food, pharma and feed industry. **F.L. CPG Spray** is based on high-purity, user-friendly raw materials which guarantee a long-lasting and safe corrosion protection for components of all kinds without gumming or resinification.

Fields of application

- For the conservation:
 - of entire machines of all kinds in case of shipping
 - of metal parts and metal tools after galvanic refinement and washing processes
 - of gear boxes, gear wheels, couplings, shafts
 - of measuring tools, precision instruments etc.
- For corrosion protection:
 - for the temporary conservation of semi-finished products
 - for the intermediate and long-term preservation of plastic injection moulds and tools as well as corrosion protection for barrel extruders for the storage time.

The special product structure prevents the penetration of **Rivolta F.L. CPG Spray** into undercuts and enables to remove it easily with only few injections and without extra cleaning.

Form	liquid
Colour	beige
Odour	neutral

Material compatibility

The product does not attack metals, plastics, paints and mineral oil-resistant seals. It should not be mixed with other greases.

Preparation of the surface


Stubborn dirt and other residues should be removed as far as possible. The metal surfaces which are to be protected should be dry and clean before the application of **Rivolta F.L. CPG Spray**.

Removability

Rivolta F.L. CPG Spray can be removed easily and quickly from the preserved parts. The solvent based cleaners of the **Rivolta S.L.X.**-line as well as the water based cleaning concentrates **Rivolta B.W.R. 180** and **Rivolta B.W.R. 210** are suitable for this.

Instructions for use

Suitable application devices and accessories in our [accessories brochure](#).

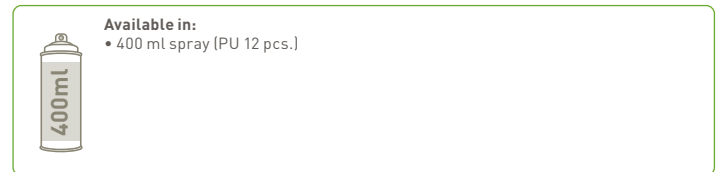

Available in:
• 400 ml spray (PU 12 pcs.)

	Value	Norm
NSF Reg.-No.	156308	-
Kine. Viscosity at +20 °C	0,95 g/cm ³	DIN 51757
Corrosion prevention time* - Indoor storing - Outdoor storing under roof - Outdoor storing	18 – 24 months 6 – 12 months n.a.	

* The products were examined by intensive tests according to DIN EN ISO 6270 condensation-water-test (KFW), DIN EN ISO 9227 salt-fog test and DIN 50917 free-weathering test. The above-mentioned prevention periods result from the thereby achieved test results as well as from further practical tests. The maximum corrosion prevention time varies with the environmental conditions.



Bremer & Leguil GmbH

Am Burgacker 30-42 • 47051 Duisburg • Germany

Tel. +49 203 99 23-0 • Fax +49 203 2 59 01

info@bremer-leguil.de

This text contains facts and statements and is determined with our best knowledge and will be checked continuously. These statements are depending - among other reasons - on experiences gained in the industry. We only pass them on without liability. Before using our products you should test the applicability and you should convince yourself of the satisfactory performance. Our application examples and suggestions should not request to violate patent rights. Product illustrations partly consist of picture compositions and therefore, do not necessarily reflect the reality.

V230815