

## F.L. HT

High-temperature chain lubricant



### The benefits at a glance

- NSF-H1 registered
- Fully synthetic
- Thermal stability up to +240 °C
- Low evaporation loss
- Excellent adhesive properties
- Good resistance to cold and hot water
- Neutral odour



## Properties

**Rivolta F.L. HT** consists of synthetic base oils and select additives which fulfil the strict demands of the food industry.

- Thermal stability up to +240 °C
- Low evaporation loss
- Good corrosion protection
- Medium viscosity for easy application
- Excellent adhesive properties minimize "fling-off" in use
- Good resistance to cold and hot water
- Neutral odour

## Fields of application

**Rivolta F.L. HT** is a fully synthetic high-quality chain lubricant based on ester oils which has especially been developed for the high temperature area in the food industry. Ideal for the use at:


- Drive and transport chains
- Packaging machines

## Instructions for use

- Please remove contaminations and residues as far as possible
- The friction points should be dry if possible to achieve the full adhesive strength of the product
- Application by brush, immersion bath or by means of automatic lubricating systems

Suitable application devices and accessories in our [accessories brochure](#).

<b>Form</b>	liquid
<b>Colour</b>	yellowish transparent
<b>Odour</b>	mild

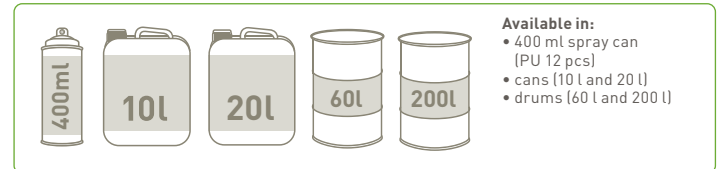

	Value	Norm
<b>NSF Reg.-No.</b>	145812/150462 (Spray)	-
<b>Density at +15 °C</b>	0,92 g/cm³	DIN 51757
<b>Viscosity index</b>	108	DIN ISO 2909
<b>Kine. Viscosity at +40 °C</b>	230 mm²/s	DIN 51562-1
<b>Kine. Viscosity at +100 °C</b>	21 mm²/s	DIN 51562-1
<b>Flash point</b>	> +250 °C	DIN EN ISO 2592
<b>Pourpoint</b>	< -30 °C	DIN ISO 3016
<b>Temperature range</b>	-25 °C up to +240 °C	-