

K.S.P. 204 nonVOC / 204 VCI

nonVOC corrosion inhibiting oils

The benefits at a glance

- Free of acids, resins and silicones
- Reliable corrosion protection
- VOC-free according to 31. BImSchV
- Excellent material compatibility
- Easy and economical processing
- High flash point
- Additional protection by VCI (K.S.P. 204 VCI)
- Drain-off inhibited (K.S.P. 204 VCI)



Properties

Rivolta K.S.P. 204 nonVOC and **Rivolta K.S.P. 204 VCI** are highly effective and silicone-free corrosion protection products and according to 31. BImSchV (VOC directive) VOC-free.

K.S.P. 204 nonVOC is a corrosion inhibiting oil of low viscosity. It is free of acids and resins and characterized by a high surface activity, spreading capability and good water-displacing properties. This product is very economical because it forms a very thin highly effective protective layer which can easily and quickly be applied and often does not need to be removed.

K.S.P. 204 VCI is a VCI (volatile corrosion inhibitor) containing thixotropic oil of low viscosity which forms an oil/ vaseline type film. Drip-free because of the film which is drain-off inhibited. Additional corrosion protection by outgassing of inhibitors which deposit on the metal surfaces out of the vapour phase. Protects metal surfaces which cannot be completely coated such as e.g. pre-assembled components, machines, installations, gears, stabilizer bars etc. Can also be used as an easy and economical alternative to VCI foils.

Form	liquid
Colour	amber
Odour	mild

Fields of application

- Preservation of entire machines of all kinds for storage and transport
- Preservation of individual assemblies
- For the intermediate / long-term preservation of semi-finished products
- Applications where VOC-free corrosion protection agents are needed

Instructions for use


The metal surfaces which are to be protected should be dry and clean before the application of **Rivolta K.S.P. 204 nonVOC** and **Rivolta K.S.P. 204 VCI**. Both products can be applied by brush, roller or by electrically or pneumatically operated spray guns.

K.S.P. 204 nonVOC can also be processed by pressure-pump sprayer. Often a processing by immersion is recommended. A tight, highly effective, but not sticky film is formed on the surfaces of the components.

Suitable application devices and accessories in our [accessories brochure](#).

Removability

If necessary it is easy to remove **Rivolta K.S.P.** products from the preserved parts. For this our water-based cleaning products with increased temperatures are suitable or our hydrocarbon-based cleaners.

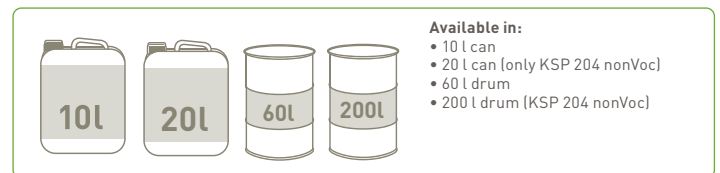

	Value		Norm
	K.S.P. 204 nonVOC	K.S.P. 204 VCI	
Density at +15 °C	0,86 g/cm ³		DIN 51757
Kine. Viscosity at +20 °C	10,3 mm ² /s	–	based on ASTM D 7042
Kine. Viscosity at +40 °C	–	14 mm ² /s	based on ASTM D 7042
Flash point	> +100 °C	+130 °C	DIN EN ISO 2719
Corrosion prevention time* (months)			
- Indoor storing	18 – 24 months	24 months	–
- Outdoor storing u. roof	06 – 12 months	12 months	

* The products were examined by intensive tests according to DIN EN ISO 6270 condensation-water-test (KFW), DIN EN ISO 9227 salt-fog test. The above mentioned prevention periods result from the thereby achieved test results as well as from further practical tests. The maximum corrosion prevention time varies with the environmental conditions.



Bremer & Leguil GmbH

Am Burgacker 30–42 • 47051 Duisburg • Germany

Tel. +49 203 99 23-0 • Fax +49 203 2 59 01

info@bremer-leguil.de

This text contains facts and statements and is determined with our best knowledge and will be checked continuously. These statements are depending - among other reasons - on experiences gained in the industry. We only pass them on without liability. Before using our products you should test the applicability and you should convince yourself about the satisfactory performance. Our application examples and suggestions should not request to violate patent rights. Product illustrations partly consist of picture compositions and therefore, do not necessarily reflect the reality.

V230814