

S.B.H. 11 / 23

Synthetic biodegradable hydraulic oils

The benefits at a glance

- Outstanding eco-friendliness
- Minimal friction and wear
- Wide operative temperature range
- High viscosity index
- Ageing and oxidation stable
- Good compatibility with seals
- High percentage of renewable commodities



Properties

Rivolta S.B.H. 11 and **S.B.H. 23** are fully synthetic readily biodegradable high performance hydraulic oils. The combination of extremely biodegradable, fully synthetic base oils with a new additive technology gives a performance spectrum to our products which is far superior to conventional HLP- or HVLP-hydraulic oils. Our additive package improves the anyhow excellent ageing, corrosion and wear characteristics of our base oils. Especially the wear protection is of outstanding importance. Because of a lack of wear protection of conventional oils increased wear occurs at the contact area "sealing element – metal surface". This leads to leakages and oil loss.

Rivolta S.B.H.-series with their special additive package avoid wear in an effective way and with this leakages of the system.

Fields of application

• Hydraulics:

For all kinds of hydraulic systems as well as hydraulic motors. **S.B.H.-series** tops the demands of DIN 51524 for hydraulic oils with specifications HLP and HVLP, except DIN EN ISO 4263 (tost-test). Moreover, **S.B.H.-series** tops the demands of DIN 15380 for HEES-oils.

Form	liquid
Colour	transparent-yellowish
Odour	neutral

Material compatibility

- Compatible with sealing materials which are resistant to mineral oils.
- Miscible with mineral and ester oils. Do not mix with polyalkylene glycol. Consider the change guidelines of DIN ISO 15380


Preparation of the lubricating point

Before a new filling with Rivolta **S.B.H. 11** or **S.B.H. 23** the following steps have to be carried out:

- First drain the old product. If the system was filled with a miscible product, no particular flushing is necessary before the new filling with **S.B.H. 11** or **S.B.H. 23**. The full performance only results from an unmixed use.
- If the system was filled with an oil which is not miscible, a flushing with **S.B.H. 11** or **S.B.H. 23** has to be carried out before the new filling.

Instructions for use

Suitable application devices and accessories in our [accessories brochure](#).

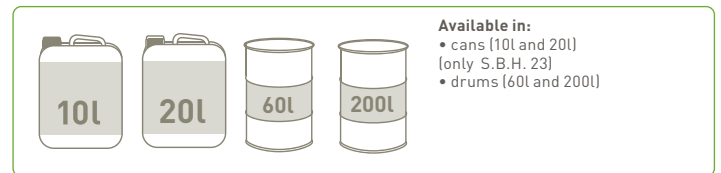

	Value		Norm
	S.B.H. 11	S.B.H. 23	
Density at +15 °C	0,91 g/ml	0,92 g/ml	DIN 51757
ISO viscosity grade	22	46	DIN ISO 3448
Viscosity index	> 190		DIN ISO 2909
Kine. Viscosity at +20 °C	37 mm²/s	105 mm²/s	DIN 51562-1
Kine. Viscosity at +40 °C	22 mm²/s	46 mm²/s	DIN 51562-1
Kine. Viscosity at +100 °C	5 mm²/s	9,5 mm²/s	DIN 51562-1
Flash Point	+180 °C	+240 °C	DIN EN ISO 2592
Operative temperature range	-30 °C up to +90 °C	-35 °C up to +100 °C	–
Corrosion protection to steel	0 – A		(DIN 51355)
Corrosion protection to copper	1		DIN EN ISO 2160
Ecological data			
Biodegradability	> 84 %	> 73 %	OECD 301 B
Percentage of renewable commodities	> 50 %		–



Bremer & Leguil GmbH

Am Burgacker 30–42 • 47051 Duisburg • Germany

Tel. +49 203 99 23-0 • Fax +49 203 2 59 01

info@bremer-leguil.de

This text contains facts and statements and is determined with our best knowledge and will be checked continuously. These statements are depending - among other reasons - on experiences gained in the industry. We only pass them on without liability. Before using our products you should test the applicability and you should convince yourself of the satisfactory performance. Our application examples and suggestions should not request to violate patent rights. Product illustrations partly consist of picture compositions and therefore, do not necessarily reflect the reality.

V250527