

S.F.R. Spray

Special mould cleaner



The benefits at a glance

- NSF-A1 registered
- Penetrates and dissolves a multitude of plastics
- Does not attack metals
- Applicable on polished surfaces
- Sprayable also upside down



Properties

Rivolta S.F.R. Spray is a powerful cleaner for the removal of residues on tools and moulds that arise from plastic processing. **S.F.R. Spray** is based on a combination of innovative ingredients and it is NSF-A1 registered. This enables the use for cleaning applications in particularly sensitive areas, eg. the food and pharmaceutical industries.

Fields of Application

Rivolta S.F.R. Spray is used to clean moulds and tools at injection moulding machines, flat film extrusion lines, blown film extrusion lines, spinning plants and extrusion plants. **S.F.R. Spray** penetrates and removes from metallic surfaces among others:

- Polyacrylate, polyamide, polystyrene
- Cellulose acetate
- Epoxy resins
- Oil deposits, oil-carbon

Form	Aerosol
Colour	light yellow
Odour	characteristic


Material compatibility

Rivolta S.F.R. Spray attacks plastics, elastomers, paints and lacquers. Metallic surfaces are **not** attacked!

Instructions for use

Spray **Rivolta S.F.R. Spray** onto the parts which are to be cleaned. After an exposure time depending on the layer thickness please remove the cleaner by wiping it off. For the complete removal e.g. in cavities we recommend to use our rapid cleaner spray **Rivolta A.C.S. 3 Spray**, **Rivolta S.B.C. Spray** or **Rivolta S.C.F. Spray** in addition.

Suitable application devices and accessories in our [accessories brochure](#).

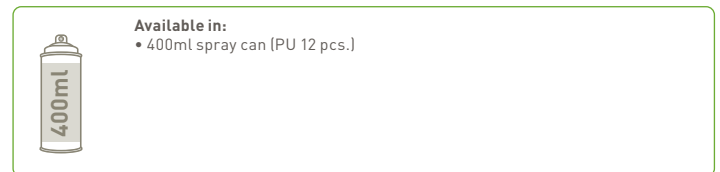

Available in:

- 400ml spray can (PU 12 pcs.)

	Value	Norm
NSF Reg.-No.	156947	-
Density at +15 °C	1,01 g/cm ³	DIN 51757