

# S.K.D. 4002

High-temperature, high-performance grease

## The benefits at a glance

- Fully synthetic
- Multipurpose in use
- Long service life also at high temperatures
- Good pumpability
- Reduces friction and wear
- Low lubricant consumption
- Very wide operative temperature range
- Energy saving by dynamic smooth running properties



## Properties

**Rivolta S.K.D. 4002** is a workstable, water-resistant, high temperature-stable synthetic grease developed for the use in heavily loaded roller and plain bearings. Beside ageing-resistant, synthetic base oils and a special thickener **S.K.D. 4002** contains a new forward-looking additive-system that offers an optimal compressive strength at all service conditions.

## Fields of application

### • Roller bearings:

- heavily loaded deep groove ball bearings, conical roller bearings and needle roller bearings at extreme low and extreme high temperatures, such as e.g. bearings in freezing tunnels, evaporator fans, bearings in soldering, welding and flame cutting machines, etc.
- bearings in electromotors, generators, compressors, fans, blowers and hot gas ventilators
- low noise roller bearings
- guide rolls in stenters
- ball bearings in clip chains of textile machines
- roller bearings of calenders or coating machines
- impellers in oven or autoclave carts
- conveyor roller and guide roller bearings in conveyor systems and ovens

|               |               |
|---------------|---------------|
| <b>Form</b>   | pasty         |
| <b>Colour</b> | beige, opaque |
| <b>Odour</b>  | mild          |

- **Plain bearings:** which are exposed to high temperatures
- **Electrical contacts:** lubrication of indoor contacts of disconnectors, switches, etc.

## Material compatibility


**Rivolta S.K.D. 4002** does not attack common metals, plastics, lacquers and seals which are resistant to mineral oil. The products should **not** be mixed with other greases.

## Preparation of the lubricating point

Please remove contaminations and old residues as far as possible.

## Instructions for use

Suitable application devices and accessories in our [accessories brochure](#).

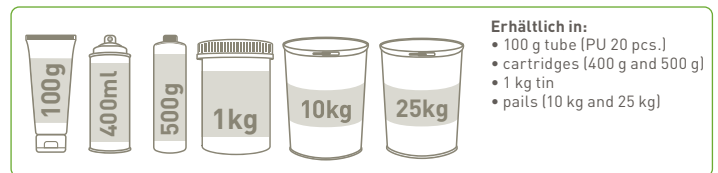

|   | Value                                  | Norm         |
|---|--|--------------|
| <b>Density at +15 °C</b>  | 0,87 g/ml                              | DIN 51757    |
| <b>Viscosity of base oil at +40 °C</b>  | 100 mm²/s                              | DIN 51562-1  |
| <b>Dropping point</b>   | > +250 °C                              | DIN ISO 2176 |
| <b>Worked penetration</b>   | 265 – 295 1/10 mm                      | DIN ISO 2137 |
| <b>ΔPW 100,000 Decrease of worked penetration after 100,000 double cycles</b>                                     | < 20 1/10 mm                           | –            |
| <b>NLGI grade</b>   | 2                                      | DIN 51818    |
| <b>Operative temperature range</b>  | -50 °C up to +210 °C                   | –            |
| <b>S.R.V.-Test:<br/>T = +150 °C / +50 °C up to +210 °C and 1 m/500.000 load changes<br/>Friction coefficient:</b> | 0,060                                  | DIN 51834    |
| <b>Wear rate:<br/>Ball<br/>Disc</b>   | 0,50 mm<br>< 1,00 µm                   |              |
| <b>Flow pressure</b>  | 15 kPa bei +20 °C<br>55 kPa bei -35 °C | DIN 51805    |
| <b>Oil separation at +40 °C</b>   | < 1 % after 18 h                       | DIN 51817    |
| <b>Corrosion protection to steel (SKF-Emcor)</b>  | 0 and 0 corr.-grade                    | DIN 51802    |
| <b>Corrosion effect on copper</b>   | 1                                      | DIN 51811    |



**Bremer & Leguil GmbH**

Am Burgacker 30–42 • 47051 Duisburg • Germany

Tel. +49 203 99 23-0 • Fax +49 203 2 59 01

[info@bremer-leguil.de](mailto:info@bremer-leguil.de)

This text contains facts and statements and is determined with our best knowledge and will be checked continuously. These statements are depending - among other reasons - on experiences gained in the industry. We only pass them on without liability. Before using our products you should test the applicability and you should convince yourself of the satisfactory performance. Our application examples and suggestions should not request to violate patent rights. Product illustrations partly consist of picture compositions and therefore, do not necessarily reflect the reality.

V230808