

## W.A.P.

High-performance grease paste



### The benefits at a glance

- Versatile lubricating and assembly paste
- Prevents seizure and fretting corrosion
- Very high pressure absorption capacity
- Good damping behavior
- Excellent water resistance
- Excellent corrosion protection properties
- Wide operative temperature range
- Very good adhesive power



## Properties

**Rivolta W.A.P.** is a light high performance grease paste on a metal soap-basis combined with highly effective white solid lubricants. **W.A.P.** excels in its high pressure absorption capacity, a very good adhesive power and its high water resistance. Excellent corrosion protection properties prevent effectively the seizing of the friction partners also in a corrosive atmosphere. **W.A.P.** is free from graphite, MoS<sub>2</sub> and nickel.

## Fields of application

**Rivolta W.A.P.** can be used as mounting and screw paste. It protects against fretting corrosion and prevents stick-slip. **W.A.P.** is especially suitable for the lubrication of chucks, clamping elements as well as stainless steel screw connections. **W.A.P.** is used to lubricate machine parts upon which high pressures, impact stresses and oscillating motions are effected, e.g. spindles, plain bearings, joint bearings, etc.


Notice: **W.A.P.** is **not** suitable for the use in roller bearings because of the large component of solid lubricants.

## Instructions for use

**Rivolta W.A.P.** is sprayed by a spray can or is applied as a paste by means of brush, spatula or cloth onto the parts which have been cleaned before. Beyond that our product is available in the 500 g cartridge for the processing with our **B&L HD two-handed grease gun**.

Suitable application devices and accessories in our [accessories brochure](#).

Form	solid
Colour	beige
Odour	neutral

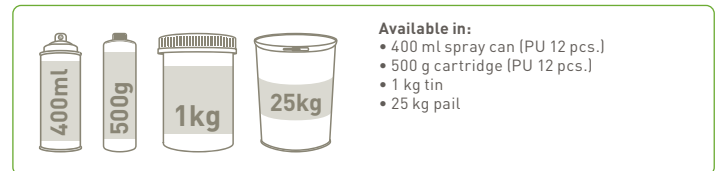

	Value	Norm
Density at +15 °C	1,20 g/cm <sup>3</sup>	DIN 51757
Viscosity of base oil at +40 °C	250 mm <sup>2</sup> /s	DIN 51562-1
Operative temperature range	-20 °C to +140 °C	–
Use as hot thread compound	bis 1200 °C	–
Dropping point	> +260 °C	DIN ISO 2176
NLGI grade	2	DIN 51818
Water resistance	0 – 90 grade	DIN 51807-1
SKF Emdor test (3 % NaCl)	0/0 Corr. grade	DIN 51802
Screw test: M12/8.8 blacked	0,11	DIN EN ISO 16047
VKA-Welding load	5500 N	DIN 51350-4



**Bremer & Leguil GmbH**

Am Burgacker 30–42 • 47051 Duisburg • Germany

Tel. +49 203 99 23-0 • Fax +49 203 2 59 01

[info@bremer-leguil.de](mailto:info@bremer-leguil.de)

This text contains facts and statements and is determined with our best knowledge and will be checked continuously. These statements are depending - among other reasons - on experiences gained in the industry. We only pass them on without liability. Before using our products you should test the applicability and you should convince yourself of the satisfactory performance. Our application examples and suggestions should not request to violate patent rights. Product illustrations partly consist of picture compositions and therefore, do not necessarily reflect the reality.

V230804