

S.K.D. 6002

Extreme temperature grease



The benefits at a glance

- NSF-H1 listed
- Very wide operative temperature range
-30°C up to +280°C / 300°C*
- Minimal evaporation losses
- Very long service life at very high operating temperatures
- Outstanding lubricating properties
- Very good adhesive strength
- Extremely low lubricant consumption
- Resistant against water, hot steam, solvents, lyes and acids
- Excellent material compatibility with plastics and sealings



Properties

Rivolta S.K.D. 6002 is a special fully synthetic grease based on a fluorine oil and a special thickener. This combination gives a thermal stability to our products that is far superior to conventional extreme temperature greases. Thus our product lubricates even up to the temperature limit for lubricants of +280°C in short term peaks up to +300°C. The inert base oil guarantees full lubricant efficiency even when aggressive mediums are present.

Fields of application

• Plastic injection moulding:

for thermally highly stressed ejectors, core actuators and other sliding surfaces at plastic injection moulding tools. Suitable for sensitive materials such as transparent parts, PC, EPDM etc. Very resistant to aggressive plastic condensates. Because of an extremely low evaporation loss Rivolta S.K.D. 6002 remains supple and lubricating active for a long time even under the highest thermal loads.

• Roller bearings and plain bearings:

Lubrication at high temperatures such as e.g. at: bearings of dryers, oven chains, electromotors, fans and compressors, running wheels in ovens and autoclave carts, etc.

• Bearings and guides:

In aggressive atmosphere, such as e.g. in the chemical industry or the metal processing industry

Material compatibility

Rivolta S.K.D. 6002 is excellent compatible with plastics and seals. **S.K.D. 6002** is not miscible with mineral oil products as well as with other synthetic lubricants.


Preparation of the lubricating point

Before using the product please clean the lubrication point thoroughly. The high technical qualities of our product are only obtainable when using it on clean metal surfaces.

Instructions for use

Suitable application devices and accessories in our [accessories brochure](#).

Form	pasty
Colour	white
Odour	odourless

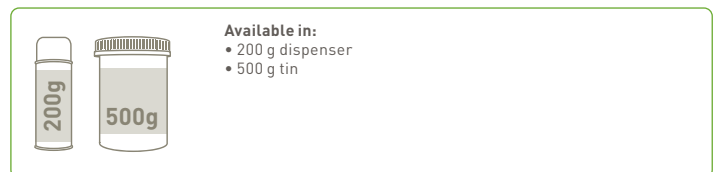

	Value	Norm
NSF Reg.- Nr.	150895	-
Density at +15 °C	1,9 g/ml	DIN 51757
Viscosity of base oil at +40 °C	500 mm²/s	DIN 51562-1
Dropping point	none	DIN ISO 2176
Worked penetration	265 – 295 1/10 mm	DIN ISO 2137
ΔPW 100,000 Decrease of worked penetration after 100,000 double cycles	< 20 1/10 mm	-
NLGI grade	2	DIN 51818
Operative temperature range	-30 °C up to +280 °C / +300 °C*	-
Evaporation loss +204 °C / 22h +250 °C / 22h +250 °C / 500h	< 1 % < 1,4 % < 12 %	DIN 58397-1
Waterresistance	0-90	DIN 51807 T1
VKA welding load	5000 / 5500 N	DIN 51350
Corrosion effect on copper 24h / +100 °C	1a	DIN 51811

* short term peaks



Bremer & Leguil GmbH

Am Burgacker 30–42 • 47051 Duisburg • Germany

Tel. +49 203 99 23-0 • Fax +49 203 2 59 01

info@bremer-leguil.de

This text contains facts and statements and is determined with our best knowledge and will be checked continuously. These statements are depending - among other reasons - on experiences gained in the industry. We only pass them on without liability. Before using our products you should test the applicability and you should convince yourself of the satisfactory performance. Our application examples and suggestions should not request to violate patent rights. Product illustrations partly consist of picture compositions and therefore, do not necessarily reflect the reality.

V230808